

13	11.24 (b)	Providing, fitting and fixing M.S. grill of required pattern in frame of windows with M.S. flats square or round bars etc including priming coat with approved steel primer all complete.							
		(a) Fixed to openings / wooden frames with rawl plug screws etc.							
		Grill weighing 12 Kg/Sqm (for railing)	8	1.85	0.6	12	106.56	Kg	191.00
	Grill weighing 16 Kg/Sqm (for Gate)	1	1.85	1.35	16	39.96	Kg	191.00	7632.36
14	16.36 (a)	Painting with synthetic enamel paint of approved brand and manufacture of (a) New work ( two or more coats over an under coat of suitable shade with ordinary paint of approved brand and manufacture).							
		Railing	7	1.85	0.6	7.77			
		Gate including railing on top of gate	1	1.85	1.95	3.61			
					11.38	Sqm	155.00	1763.51	
15	16.19	Wall painting with acrylic emulsion pain of approved brand and manufacture to give an even shade: New work (two or more coats)							
		Brick Wall	7x2	1.85	1.2	31.08			
		Columns	8x2	0.8	1.2	15.36			
					46.44	Sqm	105.00	4876.20	
A	Total								237476.45
B	Extract the Rate of Labour Cess @ 1 % on A								2374.76
C	Grand Total (A-B)								235101.69
	SAY(Rupees Two Lakhs Thirty Five Thousand and One Hundred )only								2,35,102.00

**Approved**


**Executive Engineer  
Umlam Distribution Division  
MePDCL, Umlam**


**Assistant Executive Engineer  
Umlam Distribution Sub-Division  
MePDCL, Umlam**

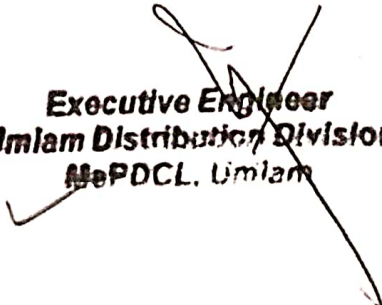
ESTIMATE FOR CONSTRUCTION OF RAINSHADE FOR DT METERING At M/S RIANGDO VENEER PVT LTD,  
 UNDER DEPOSIT WORKS (N:B-Rates are as per PWD SOR 2021-22) (N:B-Rates are as per PWD SOR 2012-13)  
 22)

Sl No	Schdl. Sl.No	Item	Qty	Unit	Rate(Rs)	Amount(Rs)
i	ii	iii	iv	v	vi	vii
1	2.1 (b)	Earthwork in excavation by Manual means upto a depth of 2m below the existing ground level for foundation trenches of foundations, footings of column/wall, retaining walls, septic tanks etc. Including bailing out water where necessary and removal of surplus earth with all lead and lifts as directed and specifies for the following classification of soils.				
		2 x 0.3 x 0.3 x 0.7	0.126	cum	414.00	52.16
2	12.5 (b) (i)	Providing soling in with stone best quality picked jhama brick, sand packed and laid to level and in panel after preparing the subgrade as directed including all labour and materials and if necessary dewatering, complete. ( b ). With Stone soling of thickness 100 mm				
		2 x 0.3 x 0.3	0.18	sq m	415.00	74.70
3	6.1(a)	Providing and laying in position specified grade of reinforced cement concrete excluding cost of centering, shuttering, finishing and reinforcement. All work upto plinth level. (a) M15 or Prop. 1:2:4 (1 cement : 2 coarse sand ; 4 graded stone aggregate 20 mm nominal size)				
		2 x 0.3 x 0.3 x 0.6	0.108	cum	8658.00	935.06
4	11.1	Structural steel work in single sections fixed with or without connecting plate including cutting, Hoisting, fixing in position and applying a priming coat of approved steel primer all complete.				
		2 x 2.4 @ 9.2 kg/Rm	44.160	Kg		
		MS Angle 50 x 50 mm				
		2 x 2 @ 4.5 kg/Rm	8.100	Kg		
Total:			52.260	Kg	117.00	6114.42
5	11.2	Structural Steel work riveted, bolted or welded in built up sections, trusses and frame work including cutting, Hoisting, fixing in position and applying a priming coat of approved steel primer all complete.				
		Steel Tube Nominal bore 50 mm (Medium)				
		4 x 0.75 @ 5.1 Kg/rm (Rafter)	15.300	Kg		
		Steel Tube Nominal bore 32 mm (Medium)				
		4 x 2.1 @ 3.15 kg/Rm (Purlin)	26.460	Kg		
Total:			41.760	Kg	123.00	5136.48

6	13.1	Providing corrugated GS or galvanised Iron sheet roofing including Vertical / curved surface fixed with polymer coated J or L hooks, bolts and nuts 8 mm dia with bitumen GI ;limpet washers or with GI limpet washers filled with white lead, including a coat of approved steel primer and two coats of aproved paints on over lapping of sheets complete ( up to any pitch in horizontal/ vertical or curved surfaces), excluding cost of purlin, rfaters and trusses and including cutting to size and shape wherever required (e) 0.63 mm thick											
		2	x	2.1	x	0.75				3.150	sqm	916.00	2885.40
7	13.4	Providing ridges or hips of width 60 cm overall width plain GS sheet fixed with polymer coated J or L hooks, bolts and nuts 8 mm dia Gi impet and bitumen washer complete. (e) 0.63 mmthick (i) 150 mm lapping											
		1	x	2.1						2.100	Rm	653.00	1371.30
A	Total											16569.53	
B	Extract the rate of Labour Cess @ 1% from "A"											165.70	
C	Total amount (A-B)											16403.83	
(Rupees Sixteen Thousand Four Hundred and Four )only											16404.00		

  
 Junior Engineer  
 Umiam Distribution Sub-Division  
 MePDCL, Shillong

  
 Assistant Executive Engineer  
 Umiam Distribution Sub-Division  
 MePDCL, Umiam

  
 Executive Engineer  
 Umiam Distribution Division  
 MePDCL, Umiam



MePDCL

MEGHALAYA POWER DISTRIBUTION CORPORATION LIMITED  
OFFICE OF THE SUPERINTENDING ENGINEER, RI-BHOI DISTRIBUTION  
CIRCLE, UMIAM

\* \* \* \* \*

"Save Energy for Benefit of Self & Nation"

CIN: U40101ML2009SGC0083944

Email: [se.rbdc.umiam@gmail.com](mailto:se.rbdc.umiam@gmail.com)

☎ : 0364 2570264

No. MePDCL/SE/RBDC/T-0127/2025-26/ 347

Dated Umiam the 24<sup>th</sup> June, 2025

To,

✓ The Executive Engineer  
Umiam (Dist) Division,  
MePDCL, Umiam

*Handwritten:* UDD  
for P/S

Sub: Approval for self-Execution work.

Ref: No. MePDCL/EE/UDD/MC-77/2025-26/323

Dated 16.06.2025

Approval is hereby accorded for self-Execution of civil work for construction of Sub-station fencing and rainshade for metering in respect of Riangdo Veneers (P) Ltd., Umiam under Deposit.

This is for your information and necessary action.

Executive Engineer  
Umiam Distribution Division  
MEPDCL, Umiam

Dairy No 575 Dt 30/6/25

~~(K. Deb)~~  
Superintending Engineer  
Ri-Bhoi (Dist) Circle, Umiam

Dated Umiam the \_\_\_ June, 2025

Memo No. MePDCL/SE/RBDC/T-0127/2025-26/

Copy to:

The Chief Engineer (Dist), E/Z, MePDCL, Shillong for favour of your kind information

Superintending Engineer  
Ri-Bhoi (Dist) Circle, Umiam

\* \* \* \* \*

RVPL:HR::F:M:4:2025-26:1  
April 16, 2025

To  
The Assitant  
Executive Engineer  
Umiam Distribution Sub Division  
MePDCL, Umiam

**Sub: Shifting of Transformer**

Dear Sir,

With reference to the subject mentioned above, we would like to inform you that a plot of land 3000 square meters has been allotted to Riango Veneers Pvt. Ltd. by the Directorate of Co Industries, Shillong, vide letter no. M/Dind/Genl/102/2021/249 dated 6th October, 2023.


In this regard, we kindly request you to initiate the process for shifting the transformer (250 KVA) located at the premises of S.M. Polypack Industries to the newly allotted premises of Riango V Ltd. A copy of the No Objection Certificate (NOC) obtained from S.M. Polypack Industries herewith for your reference.

We would also like to inform you that the construction of the transformer pad and sub-station for new site will be undertaken by us.

We request you to kindly take the necessary action at the earliest to facilitate the shifting of the transformer and to expedite the process from your end.

Thanking you for your cooperation.

Yours faithfully,  
for Riango Veneers Pvt. Ltd.

  
Pralay Kumar Jana  
General Manager

Encl: a) copy of allotment letter of land to Riango Veneers Pvt. Ltd.  
b) copy of NOC obtained from S.M. Polypack Industries

Copy to : The Executive Engineer Umiam Distribution Division MePDCL, Umiam

GOVERNMENT OF MEGHALAYA  
DIRECTORATE OF COMMERCE & INDUSTRIES  
Lower Nongrim Hills, Opp. MES office, Shillong - 793 005  
Email: industries\_meg@nic.in

No. M/Dind/Genl/102/2021/249

Dated Shillong, the 6<sup>th</sup> October, 2023.

To

✓ The Director,  
M/s Riango Veneers (P) Ltd.,  
Umiam Industrial Area, Umiam,  
Ri-Bhoi District.

Sub: Allotment of land in the Umiam Industrial Area, Ri-Bhoi District.

Sir,

With reference to the above subject, I am to inform that the Land Allotment Committee in its meeting held on 12.09.2023 has approved for allotment of additional land measuring 3000 square metres in the Umiam Industrial Area, Ri-Bhoi District for the existing unit which is engaged in production of sawn timber, veneers, plywood etc.

**This allotment is subject to :**

1. Payment of ground/land rentals to be determined/fixd by the Government from time to time and other taxes/charges, if any.
2. Execution of Lease Agreement and fulfilment of terms and conditions as may be incorporated in the Lease Agreement.
3. Fulfilment of all statutory laws in force and obtaining of all statutory clearances/NOCs and other necessary clearances/NOCs including "Consent to Establish"/"Consent to Operate" from the Meghalaya State Pollution Control Board.

**You are also to note the following :**

- (a) Demarcation of the land will be done by the Meghalaya Industrial Development Corporation Ltd.
- (b) Lease agreement will be executed within 10 (fifteen) office working days from the date of issue of sanction for transfer of the land by the Commerce & Industries Department and in case of failure, the allotment will be cancelled.
- (c) Possession of the land will be given within 6 (six) office working days from the date of execution of lease agreement.
- (d) In case the firm do not commence production/operation within 3 (three) years from the date of possession of the land or do not use the land for the purpose it was allotted and leased out or stops functioning for more than 3 (three) years, the land will revert back to this Department and the firm shall have no right to claim anything whatsoever.

- (e) The firm shall have to erect boundary pillars/boundary wall within 90 (ninety) days from the date of possession of the land.
- (f) In case of discovery of false claims, false declaration or other wrong done during the allotment process or during the validity of the lease agreement and/or any order to that effect from any competent Court, the allotment/lease agreement will be cancelled.

Yours faithfully,



Director of Commerce & Industries.

Memo No. M/Dind/Genl/102/2021/249(A) Dated Shillong, the 6<sup>th</sup> October, 2023.

Copy to :

1. The Managing Director, Meghalaya Industrial Development Corporation Ltd., "Kismat", Upland Road, Laitumkhrah, Shillong - 793003. He is requested to demarcate the land and effect handing and taking over the land to the firm. He is also requested to prepare site map and furnish 3 copies to this Department.
2. The Deputy Secretary to the Government of Meghalaya, Commerce & Industries Department, Myntdu Building, Shillong.
3. The General Manager, District Commerce & Industries Centre, Nongpoh.
4. Unit's file.

Director of Commerce & Industries.



# S M POLYPACK INDUSTRIES

Head Office : Thana Road, Shillong-793001, Meghalaya, Phone: 0364-2502456, 2501751  
Fax: 2222570, Email: smpolypack@gmail.com  
Branch Office : 105, B R Tower, 1<sup>st</sup> Floor, 21 Jaganpali, Ulubari, Guwahati-781007, Assam  
Ph: 0361-2527945/ 2529393, Email id: smgr\_bo@gmail.com  
WORKS : Umiam Industrial Estate, Ribhoi District, Meghalaya

Date: 08-01-2025


## NO OBJECTION CERTIFICATE

This is to certify that I Shri Binod Kumar Keyal S/o Late ShreeLal Keyal, Partner of S M Polypack Industries located at Barapani Industrial Area, Umiam have NO OBJECTION for disconnection of our electrical connection (consumer Id. 1000198268) from our 250 KVA transformer. I further certify that S M Polypack Industries has handed over all electrical equipments including 250 KVA transformer bearing Sl.no T/250/ME/03 to Riangdo Veneers Pvt. Ltd. and we have no objection if Riangdo Veneers Pvt. Ltd. enhances the connected load for operating and conducting their business activities..

S. M Polypack Industries

Binod Kumar Keyal Partner

Partner



MEGHALAYA POWER DISTRIBUTION CORPORATION LIMITED  
OFFICE OF THE EXECUTIVE ENGINEER UMIAM DISTRIBUTION MePDCL, UMIAM

(0364) 2570 54

No. MePDCL/EE/UDD/MC-02/2024-25/

Dated, Umiam, the \_\_\_\_\_ February 2025

To,

The Senior Account Officer,  
Cash & Banks, MeECL  
Lumjingshai, Shillong.

Sub: Receipt of ONLINEMODE through RTGS /NEFT Receipt of ONLINEMODE through RTGS against the Estimate for Installation of HT Metering for Providing Power Supply to Riango Veneer MIDC, Ri-Bhoi District, under Deposit Work.

Ref: MePDCL/UDSD/T-03 (Pt-IV)/2024-25/263 Dt 03.02.2025  
2.RVPL/MePDCL/AEE/24-25/01 Dt 31.01.2025

Sir,

With reference to the subject above, please find enclosed here with the Payment through RTGS/ NEFT , No ICICR42025013000531026/SBIN0000181/7,07170 DR DT 30.01.25, of Rs 7,07,170 .00 (Rupees Seven Lakhs Seven Thousand One Hundred Seventy )Only ,for Installation of HT Metering ,Load Security and Application Fee for Providing Power Supply to Riango Veneer MIDC, Ri-Bhoi District  
This is for favour of your kind information and necessary action.

Encl: as stated

Yours faithfully,

K. Deb  
Executive Engineer,

Memo No. MePDCL/EE/UDD/MC-02/2024-25/1247(a) Dated, Umiam, the 25<sup>th</sup> February 2025


Copy to:

1. The Superintending Engineer, Ri-Bhoi Distribution Circle, MePDCL, Umiam for favour of kind information alongwith a copy of the same.
2. The Assistant Executive Engineer, Umiam Distribution, Sub-Division, MePDCL, Umiam for information and necessary action .
3. The DAO, O/o. The Executive Engineer, Distribution, MePDCL Umiam for information and necessary action alongwith a copy of the same .

EXECUTIVE ENGINEER/ UDD

W/No - 704.  
dt - 7/3/25.

T-29(B)



MEGHALAYA POWER DISTRIBUTION CORPORATION LIMITED

UMIAM DISTRIBUTION SUB-DIVISION  
UMIAM-793103, RI-BHOI DISTRICT, MEGHALAYA  
CIN: U40101ML2009SGC008394

No. MePDCL/UDSD/T-29/2024-25/258

Dated: 20<sup>th</sup> January 2025

To,  
M/S Riangdo Veneer Pvt Ltd  
MIDC, Umiam

Sub: Bill of Estimate for providing power supply under Deposit works

Sir,  
Please find enclosed here with the Bill No. 061 Sl. No 61 Dated 20 January 2025 along with approved estimate of HT Metering and Load Security for providing power supply to M/S Riangdo Veneer Pvt Ltd at MIDC, Umiam under Deposit Works an amounting to Rs: 707170.00 (Rupees Seven Lakh Seven Thousand One Hundred and Seventy) only. Mode of payment is as below.

Payment may be made through On-line mode by NEFT/RTGS to the account as detailed below:

- |                    |                                 |
|--------------------|---------------------------------|
| a) Name of Bank    | - State Bank of India,          |
| b) Name of Branch  | - Shillong Branch, Shillong     |
| b) Branch Code     | - 00181                         |
| c) IFSC Code       | - SBIN 0000181.                 |
| d) Name of Account | - MePDCL DEPOSIT WORKS ACCOUNT. |
| e) Account No.     | - 38523607373.                  |
| f) GSTIN No.       | - 17AAICM1935FIZJ.              |

Details of above payment i.e. (i) Transaction Reference No., (ii) Amount credited and (iii) Date of Transaction may be intimated to the Executive Engineer, Umiam Distribution Division, Umiam along with photo copies of approved estimate.


Kindly note that this Bill stands valid only up to a period of 3 (three) months from the date of issue of this bill after which the amount may vary and the works will be taken only after full payment.

Kindly note that the Right of way may be taken up by the Owner

Enclosed: As stated.

Yours faithfully,

O/C

  
Assistant Executive Engineer,  
Umiam Distribution Sub-Division,  
MePDCL, Umiam.

Dated: 20<sup>th</sup> January 2025

No. MePDCL/UDSD/T-29/2024-25/258(a)

Copy to:

1, The Executive Engineer, Umiam Distribution Division, MePDCL, Umiam, for favour of kind information and necessary action, Xerox copy of Bill is also enclosed here with.

  
Assistant Executive Engineer