






Bangalore electricity Supply Company limited

Estimate No:-

Electrification of HT installation 650KVA in favour of
MANAGER, PEATMAN COCO PRODUCTS Limited, spot of at
Holalagunda village in Amruthuru section.

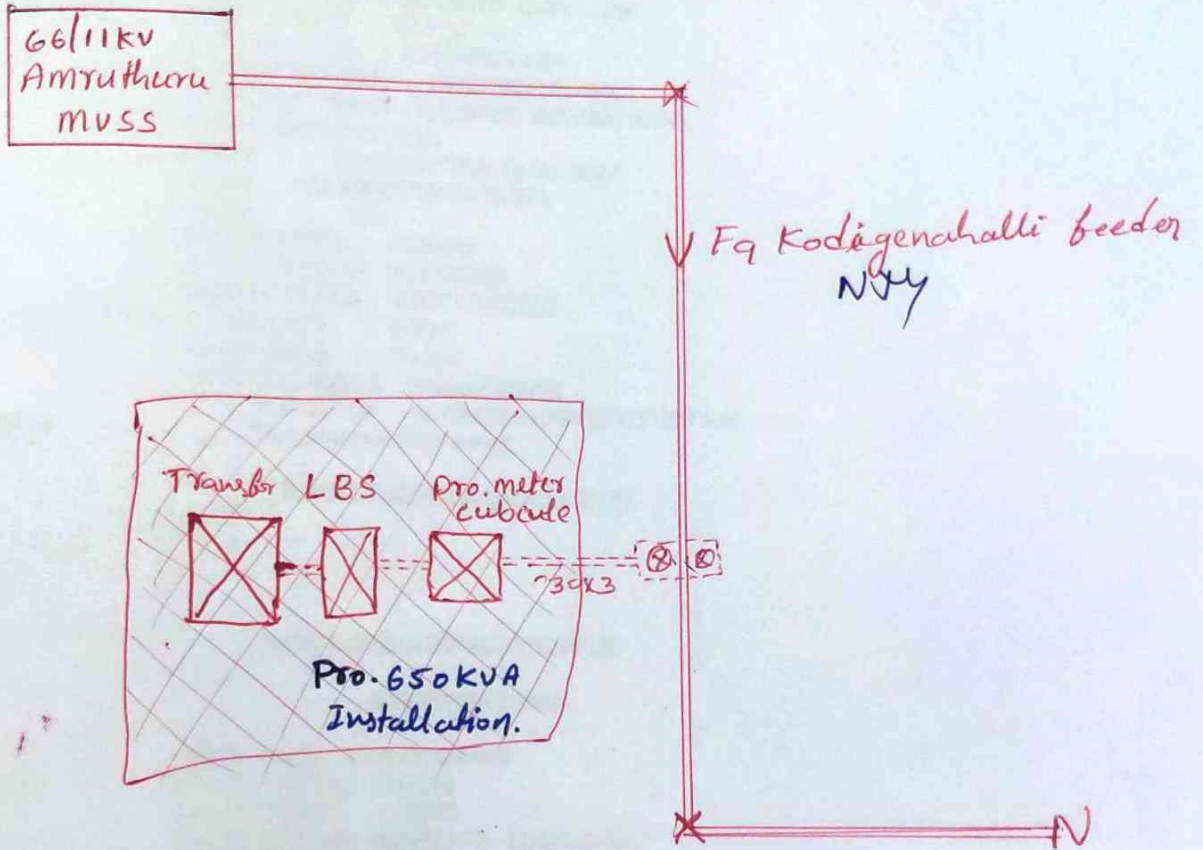

-: INDEX :-

-  EX. 11KV line.
-  EX. pole
-  pro. DP set.
-  Pro. 650KVA HT Centre

Chuphu

ಶಾಖಾಧಿಕಾರಿ (ಎ)
ಬೆ.ಎ.ಕಂ. ಅಮೃತೂರು

ASSISTANT EXECUTIVE ENGINEER (V)
BESCOM, YEDIYUR SUB DIVISION
YEDIYUR

Bangalore Electricity Supply Company Limited

STATION FEASIBILITY REPORT

1	Sub-Station Details :	
	a) Name of the Station	66/11 KV MUSS AMRUTHURU
	b) Installed Capacity	01 X 12.5MVA , 01 X 12.5MVA
	c) Station Peak Load	660A, 11.0MW
	d) Bank No	Bank-1
	e) Bank Peak Load	567A, 8.6MW
2	Feeder Details :	
	a) Name of the Feeder	F9 - KODAGENAHALLI Feeder
	b) Feeder Peck Load	62A
	c) C.T. Ratio	200 / 1A
	d) Cable Size	240 Sqmm
	e) Conductor used	Rabbit
	f) H.T.V.R Tail End	Feasible
3	Transformer :	
	a) Location :- BYALADAKERE	Feeder is feasible for Proposed 650KVA Load
	b) Capacity :- Pro.1500 KVA	
	c) Connected Load :- 650KVA	
	d) Feeder Peak Load :- 62A	
4	Feeder is feasible for Proposed 650KVA Load	

Chuphu
ಶಾಖಾಧಿಕಾರಿ (ಎ)
ಬೆ.ವಿ.ಕಂ. ಅಪ್ಪುಕೂರು

[Signature]
ASSISTANT EXECUTIVE ENGINEER (VI)
BESCOM, YEDIYUR SUB DIVISION
YEDIYUR